



SERIES PEE100

2 way bi-stable (double acting) angle seat valve pneumatically operated.



OVERALL DIMENSION

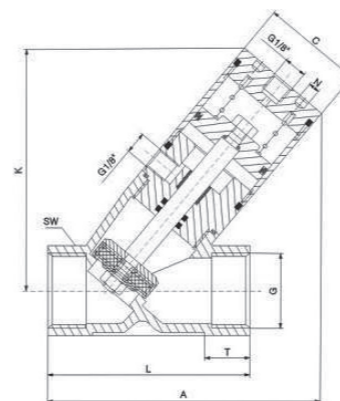

PRESENTATION

Compact solution
Maintenance free sealing pack
NPT thread on request
AISI 316 body available on request
From 3/8" up to 2"
3/4" and 1 1/4" version available on request

VALVE FEATURES

FLUID PRESSURE	Up to max 10bar
CONTROL PRESSURE	3 - 8bar
CONTROL FLUID	Neutral gas, Air
BODY MATERIAL	AISI 304
SEALING	PTFE
FLUIDS	Water, Oils, Gases, Pulp and other liquids
FLUID VISCOSITY	Max 600cSt (mm2/s)
FLUID TEMPERATURE	-10°C to +120°C
AMBIENT TEMPERATURE	-10°C to +80°C
CONTROL TYPE	Double acting

CONNECTION	Threaded (NPT, BSP)
------------	---------------------

USE	Food, Packaging, Petrochemical, Metallurgical, Spraying, Vehicles, Printing and Dyeing Machinery equipment
-----	--

CODE	ACTUATOR	DN	PILOT PRESSURE	MAX PRESSURE	G	N	K	C	T	A	L	SW
		[mm]	[bar]	[bar]		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
PEE332CGW10	Ø32	DN10	3 - 8	10	G3/8"	5	99	38	12	112	68	27
PEE332DGW15	Ø32	DN15	3 - 8	10	G1/2"	5	99	38	13.5	112	68	27
PEE340FGW25	Ø40	DN25	3 - 8	10	G1"	5	110	45	16.5	125	90	40
PEE350HGW40	Ø50	DN40	3 - 8	10	G1 1/2"	5	138	55	19	158	116	56
PEE363IGW50	Ø63	DN50	3 - 8	10	2"	5	160	69	21.5	190	138	69